



MEGAHIRIB


Lowsloped roofing for institutional, warehouse and commercial establishments.

PRODUCT INFO

SUBSTRATES	Hot-dip Metallic Coated Steel - Hot-dip Zinc-Coated Steel - Hot-dip 55% Aluminum-Zinc Alloy Coated Steel	PAINT COATING SYSTEM	Oven baked Oil free Polyester topcoat over a corrosion-resistant Primer with Oil free Polyester backing coat PVDF SMP, available upon request
NOMINAL THICKNESS	0.50 mm to 0.80 mm	PAINT COATING THICKNESS	Topcoat : 12 – 15 microns Backing Coat : 4–8 microns
FEED WIDTH	1220 mm	AVAILABLE COLORS	Red, Green, Brown, Beige, Blue, White Charcoal Gray, Teracotta Orange, Fire Red Other Colors available with terms and conditions applied
EFFECTIVE COVERAGE	918 mm (+/- 10mm)	LENGTH	Customized length available with terms and conditions. Onsite rollforming for longer panels
RIB HEIGHT	90 mm (+/- 10mm)		


* Bended Accessories Available (Stainless materials available upon request)

PRODUCT SPECIFICATIONS

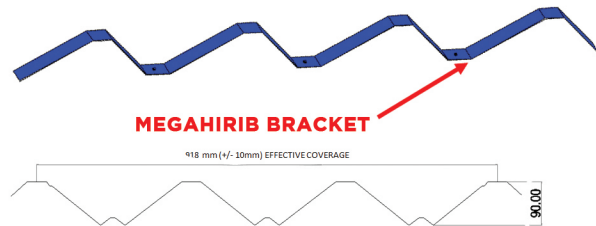

SIZES OF TEKSCREW:

Megarib Panel to Bracket	12 x 35	Steel
	12X35	If without insulation
	12X45	If with 10mm thick insulation
Bracket to Purlins	12X55	If with 15 mm to 25mm thick insulation
	12X65	If with 50mm thick insulation rock wool

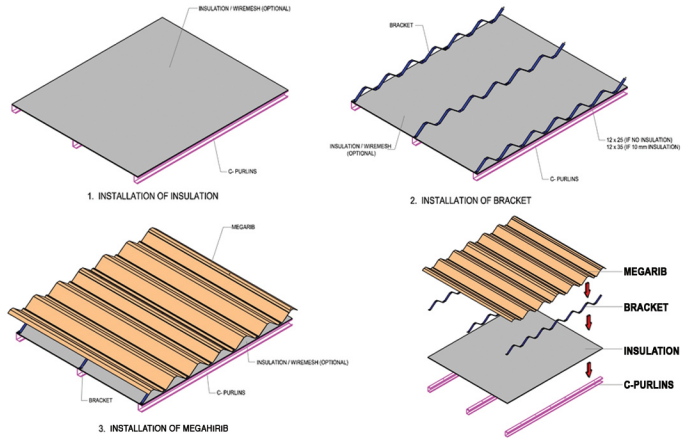

HANDLING, STORAGE AND INSTALLATION GUIDELINES

- Lift and bring down panels at its horizontal sides. Lifting may require two to three persons for longer panels.
- Panels should be stored in dry, shaded and good ventilated area. Avoid contact with wet lumber, soil or chemical contamination. Provide cover if not for immediate use.
- When panels become wet during storage, separate without delay, remove surface moisture with clean cloth and stack so air can circulate and complete the drying process.
- Panels should be piled over a pallet 10 cm from ground level and an inclination of 10° minimum.
- Roof structures and frames must be properly anchored.
- The spacing of the purlins must conform to the module distance required for the profile. Ensure that all purlins are in one planes and levelled.
- Adjust purlins at the gutter eaves line by considering the thickness of the fascia board to be used.
- Gutters must be installed first prior to the installation of roof panels.
- always align the panels before anchoring to the purlins. For te proper alignment of panels, make sure that the first panel to be laid out properly aligned with the gutter line. Run a string from the edge of the first panel laid out across the last panel to be installed, align and fasten all the rest of the panels using the string line reference.
- During installation, use rubber soled shoes and always step on or near the purlins to minimize indentations and prevent leakage due to it.
- Always clean-off debris such as fasteners, rivets, metal filings, metal cuttings and other metallic pieces every each day of installation.
- Minimize use of touch-up paint.

NORTH LUZON

LA UNION ROLLFORMING PLANT
 Poro Pt., San Fernando City, La Union
 ☎ (072) 242-0331/32
 ☎ +63 923-829-0058

BENGUET SALES OFFICE
 Palmaville, Puguia, LaTrinidad, Benguet
 ☎ (074) 665-8685
 ☎ +63 906-568-5301

BANTAY SALES OFFICE
 Brgy., Puspap, Bantay, Ilocos Sur
 ☎ (077) 604-2994
 ☎ +63 923-286-0245

SAN NICOLAS SALES OFFICE
 Brgy. 12, San Cayetano, San Nicolas, Ilocos Norte
 ☎ (077) 770-3773
 ☎ +63 922-411-4141

PANGASINAN SALES OFFICE
 Brgy. Nalsian, Calasiao, Pangasinan
 ☎ (075) 523-9799, (075) 517-3970
 ☎ +63 921-984-4268

VILLASIS SALES OFFICE
 Brgy. Bacag, Villasias, Pangasinan
 ☎ (075) 524-7233
 ☎ +63 968-852-8412

CENTRAL LUZON

PAMPANGA ROLLFORMING PLANT
 McArthur Highway, Brgy. Baliti, City of San Fernando, Pampanga 2000
 ☎ (045) 455-2490 or (045) 455-5139
 ☎ +63 917-169-0913

ISABELA SALES OFFICE
 Olma Bldg., Purok Nieto, Maharlika Highway, Batal, Santiago City, Isabela
 ☎ +63 906-712-8854
 ☎ +63 917-829-1593

NUOVA ECIA SALES OFFICE
 Piazza Veintidos Building, Brgy. San Miguel Na Munti, Talavera, Nueva Ecija
 ☎ +63 965-738-5230

NATIONAL CAPITAL REGION

MAKATI OFFICE
 3/F 39 Plaza Drive, PHINMA Plaza, Rockwell Center, Makati City
 ☎ (02)8870-0548, (02) 8870-0368

CAINTA ROLLFORMING
 Warehouse 1B, Mercedes Business Park, Brgy. San Andres, Cainta, Rizal
 ☎ +63 905-514-7156

SOUTH LUZON

MAIN PLANT AND HEAD OFFICE
 Chipeco Avenue Extension, Brgy. Real, Calamba City, Laguna
 ☎ (02) 8520-8822 to 23
 ☎ Globe +63 917-503-3965, Smart +63 919-003-2303

QUEZON WAREHOUSE
 Purok Ilang Ilang II, Brgy. Silangan Mayao, Lucena City
 ☎ +63 923-839-8073

WESTERN VISAYAS

BACOLOD ROLLFORMING PLANT
 Lki. 3 Bldg., Lacson Ext. St., Brgy. Singcang-Airport, Bacolod City
 ☎ (034) 474-2673
 ☎ +63 950-750-9615

CEBU ROLLFORMING PLANT
 Pagutlan, Tayud, Consolacion, Cebu
 ☎ (032) 260-4429, (032) 260-4432
 ☎ +63 949-362-9271

CENTRAL & EASTERN VISAYAS

BATANGAS ROLLFORMING PLANT
 Brgy. Soro-Soro, Karsada, Batangas City
 ☎ +63 922-366-1749

BICOL ROLLFORMING PLANT
 Princeton Warehouse, San Jose, Pili, Camarines Sur
 ☎ +63 951-108-0313

ILOILO ROLLFORMING PLANT
 Circumferential Road, Brgy. Tacas, Jaro, Iloilo City
 ☎ (033) 323-4500
 ☎ +63 942-951-2521

TACLOBAN ROLLFORMING PLANT
 Brgy. 82, National Highway, Marasbasas, Tacloban City
 ☎ (053) 832-4247
 ☎ +63 997-297-4085

NORTHWESTERN MINDANAO

CAGAYAN DE ORO ROLLFORMING PLANT
 Cor. Malasag Road Zone 9, Cugman, Cagayan De Oro City
 ☎ (088) 855-1563, (088) 855-1684
 ☎ +63 906-875-5883

ZAMBOANGA ROLLFORMING PLANT
 LB Compound, Veterans Ave., Sta. Maria, Zamboanga City
 ☎ (062) 992-7957/7959
 ☎ +63 997-955-4339

OZAMIS SALES OFFICE
 Rizal Ave., Lam-an, Ozamis City
 ☎ (088) 521-5002, (088) 521-4998
 ☎ +63 917-777-0898

SOUTH MINDANAO

DAVAO ROLLFORMING PLANT
 Bo. Ilang, Davao City
 ☎ (082) 238-0592, (082) 238-0593
 ☎ +63 922-655-6765

BUTUAN ROLLFORMING PLANT
 Butuan Premier Warehouse, Km. 3 Baan, Butuan City
 ☎ (085) 815-5692
 ☎ +63 925-731-2906, +63 977-841-4841

GENERAL SANTOS SALES OFFICE
 Km 3 Bty Compound, National Highway, Brgy. Apopong, General Santos City
 ☎ (083) 552-6116
 ☎ +63 963-124-5496